



Paver Setter Assembly Instructions

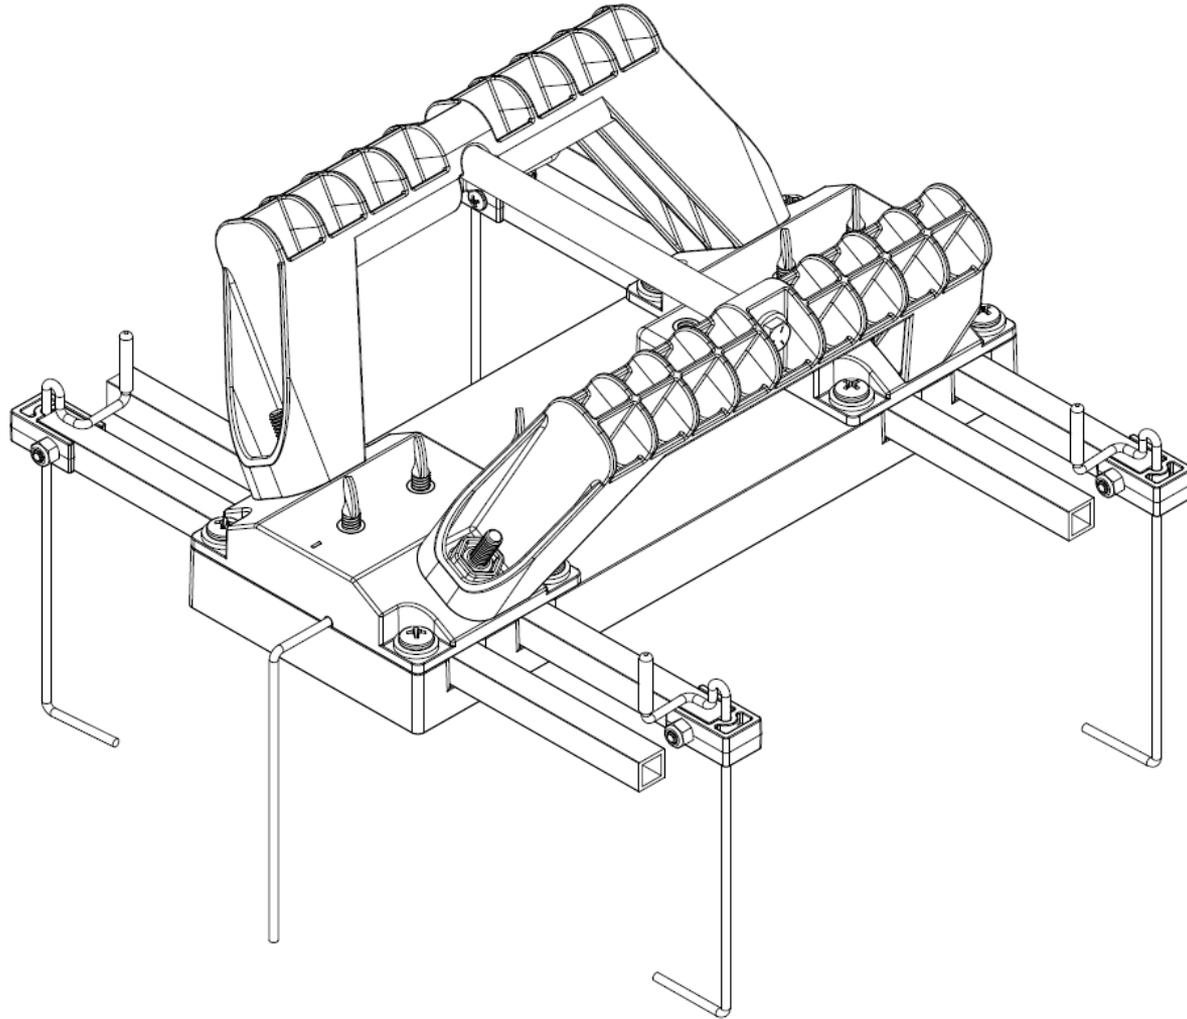

Tools Required and Part Layout


The following tools are required:

- (1) Phillips Head Screw Driver
- (2) 7/16" Wrench
- (1) 9/64" Wrench

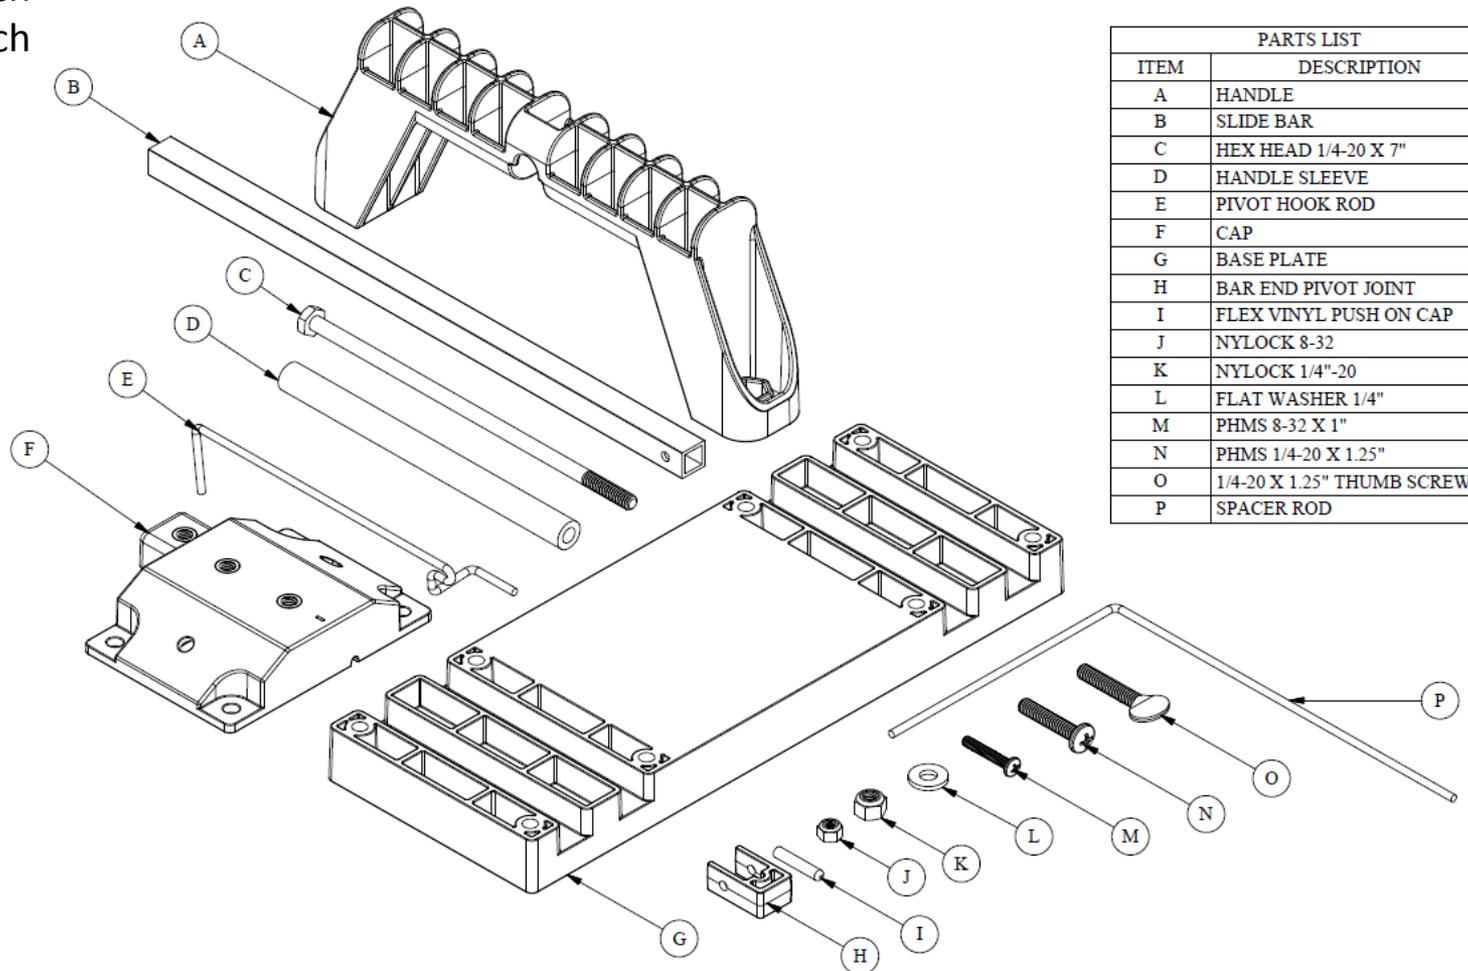

PARTS LIST	
ITEM	DESCRIPTION
A	HANDLE
B	SLIDE BAR
C	HEX HEAD 1/4-20 X 7"
D	HANDLE SLEEVE
E	PIVOT HOOK ROD
F	CAP
G	BASE PLATE
H	BAR END PIVOT JOINT
I	FLEX VINYL PUSH ON CAP
J	NYLOCK 8-32
K	NYLOCK 1/4"-20
L	FLAT WASHER 1/4"
M	PHMS 8-32 X 1"
N	PHMS 1/4-20 X 1.25"
O	1/4-20 X 1.25" THUMB SCREW
P	SPACER ROD

Assemble Handles to Caps

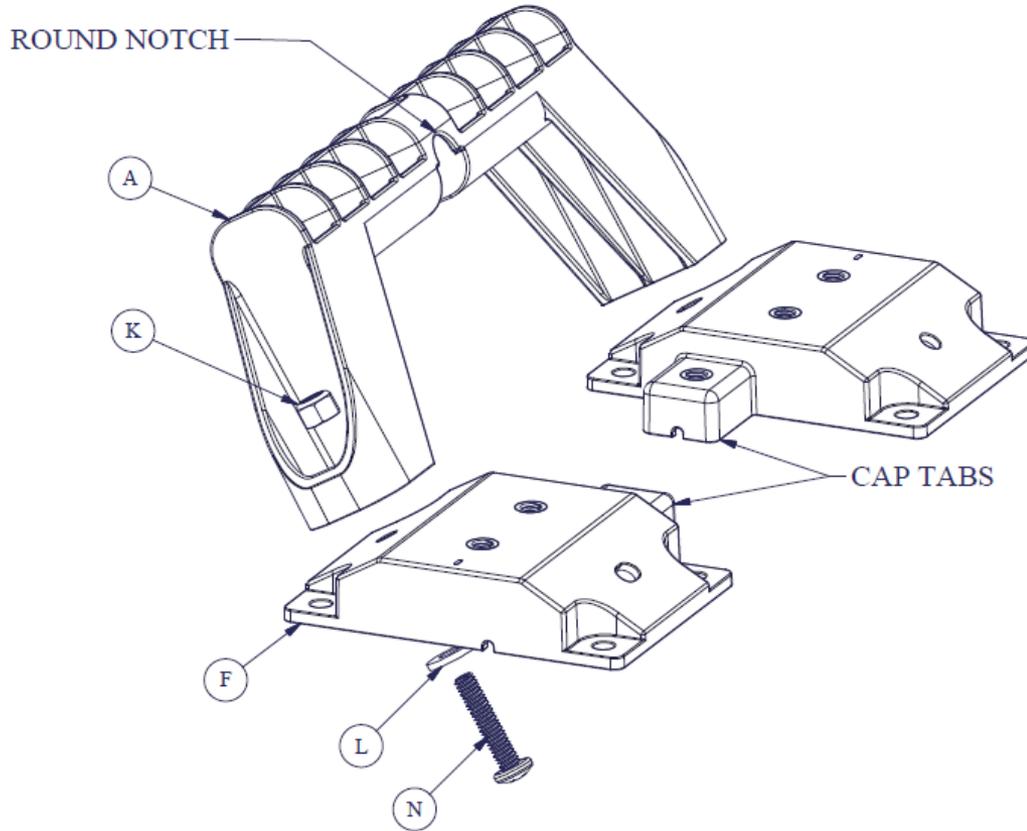


Attach (F) Caps to (A) Handles using (N) Screw, (L) Washer and (K) running the screw (N) up thru the underside of the cap (F). The handle (A) has a molded in feature to retain (K) nut.

The tabs on the caps (F) must face inward toward each other and the handles (A) must have the round notch facing inward toward each other.


Assemble Caps to Base Plate

Assemble the caps (F) to the base plate (G) using (N) screws, (L) washer, and (K) nut. Run the screw (N) down thru the top of the caps into base plate (G) which has a molded in feature to retain nut (K).

*Note, Caps (F) have a slot feature on each side. If there is any hole misalignment with the base plate (G), loosen, adjust and retighten handles (A) to caps (F).

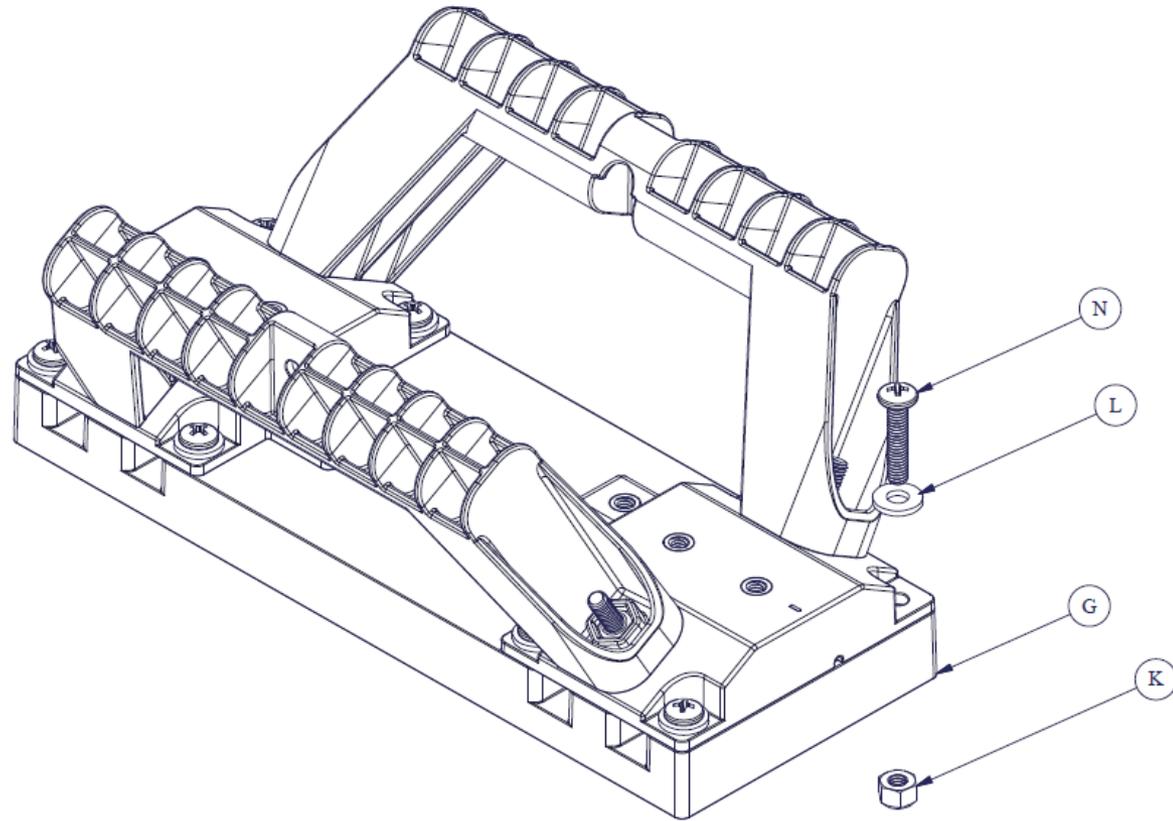


Install Cross Member Handle

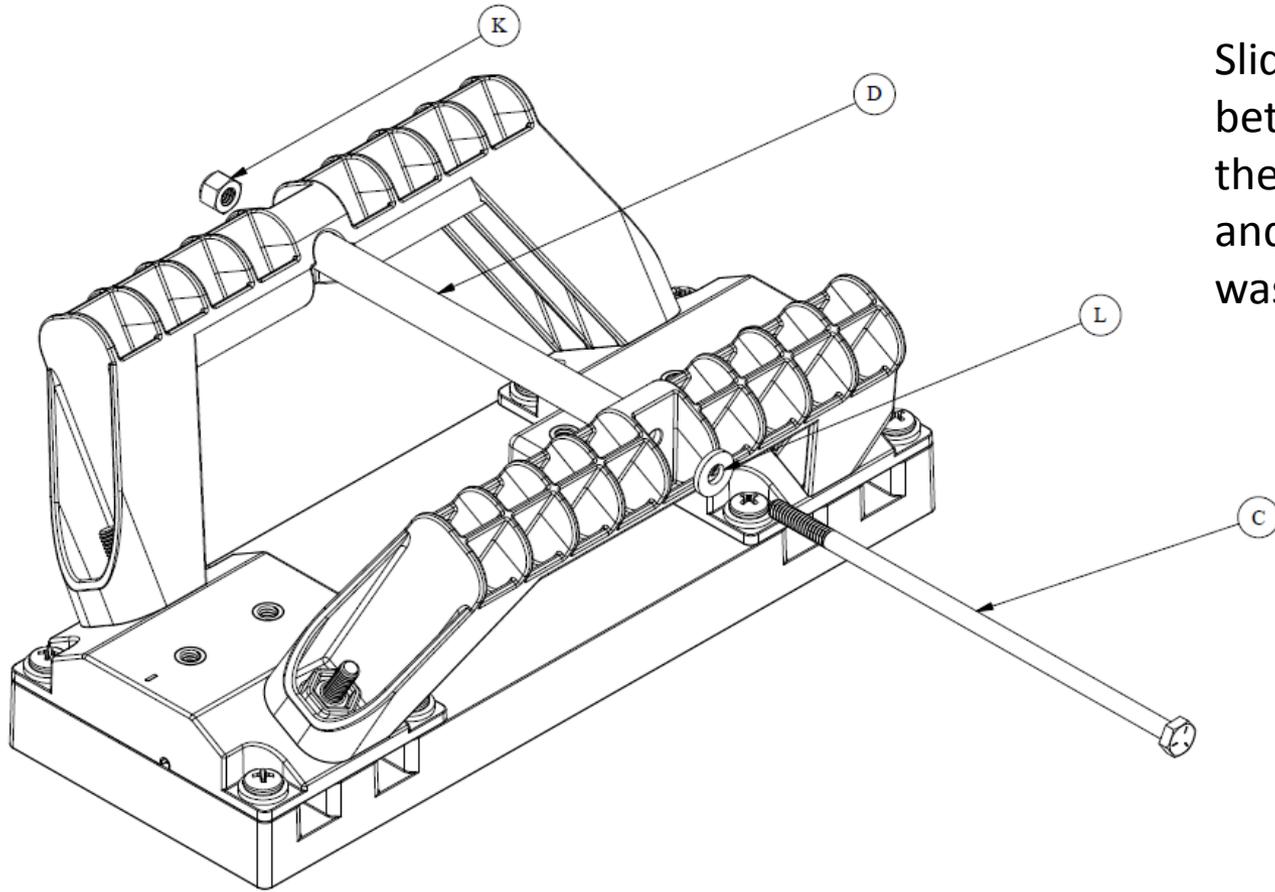

Slide handle sleeve (D) between handles (A) up into the round notch. Then install and tighten the 7" bolt (C), washer (L) and nylock (K)

Assemble Slide Bars

Place rod (E) inside half round groove of pivot joint (H) the slide over bar (B) until holes align. Attach using screw (M) and nut (J). Place vinyl cover (I) over top of rod (E).

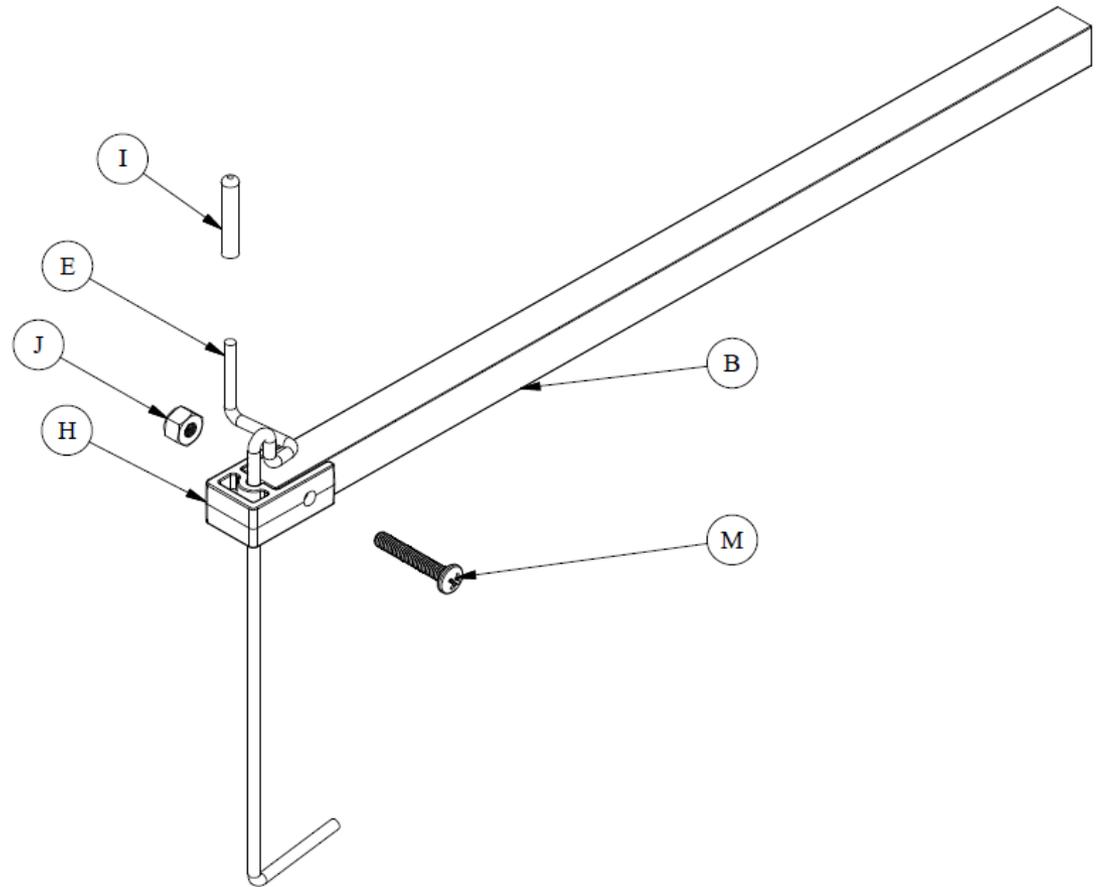

Install Slide Bar Assemblies

Insert the four slide bar assemblies into the square channels of the base plate (G). To minimize interference of use with handles, place the inner two slider bars such that the hook rod swings counter clockwise to release paver. Place spacer rod (P) into the groove between base plate (G) and cap (F). Use thumb screw (O) to tighten down slide bars and spacer rod.

